


Modular safety valves with optional spool position monitoring

On-off, direct operated, conforming to Machine Directive 2006/42/EC - certified by

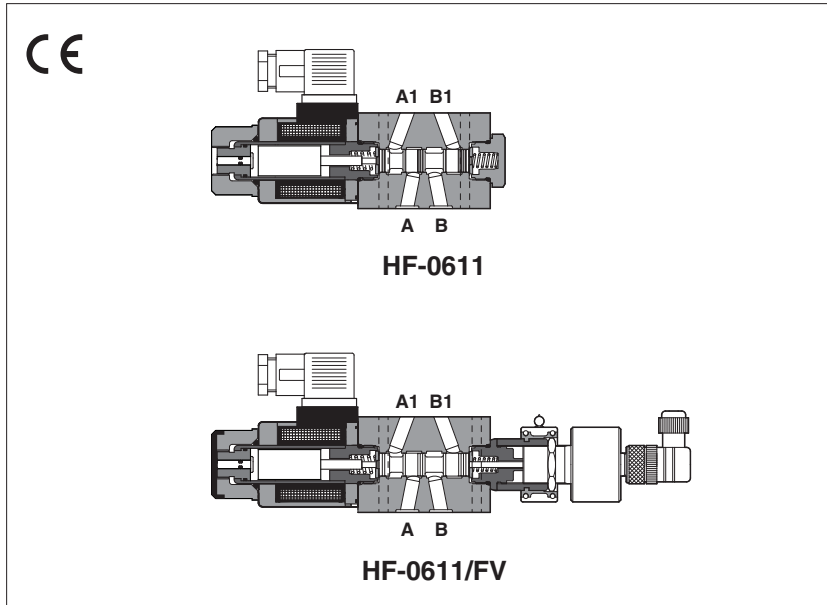

HF are spool type, direct operated solenoid valves in modular execution, normally used for safety functions to shut-off or to by-pass the hydraulic user lines. They are available with optional **FV** inductive position switch for spool position monitoring, **CE** marked and certified by **TÜV** in accordance with safety requirements of Machine Directive 2006/42/EC.

Technical characteristics

They are derived from standard directional valves type DHE (see KT tab. E015), but with special body for modular assembly with all ISO 4401 size 06 modular valves.

Applications

Syncro press brakes, vertical presses, plastic injection, ceramic presses.

Certification

The **TÜV** certificate can be downloaded from www.atos.com, catalog on line, technical information section.

Mounting Surface: **ISO 4401 size 06**

Max flow: **60 l/min**


Max pressure: **350 bar**

1 MODEL CODE

HF-0 Modular directional valve size 06	61	1	/	A	/	FV	-	E	-	X	24DC	**	/*
Valve configuration , see section 2 61 = single solenoid, central plus external position, spring centered 67 = single solenoid, central plus external position, spring offset												Series number	Seals material, see section 4: - = NBR PE = FKM BT = HNBR (1)
Spool type : 1, 3, 4 see section 2													Voltage code , see section 7
Options: A = solenoid mounted at side of port B B = orientation of coil and proximity connectors rotated of 180° WP = prolonged manual override protected by a rubber cap (1)													00-AC = AC solenoids without coils (1) 00-DC = DC solenoids without coils (1) X = without connector See section 6 for available connectors, to be ordered separately Coils with special connectors (1) XJ = AMP Junior Timer connector XK = Deutsch connector XS = Lead Wire connection
Optional spool position monitor: FV = inductive position switch (only for HF-0611, HF-0614, HF-0673)													E = solenoid OE for AC and DC supply

(1) Not available for FV version

2 CONFIGURATION

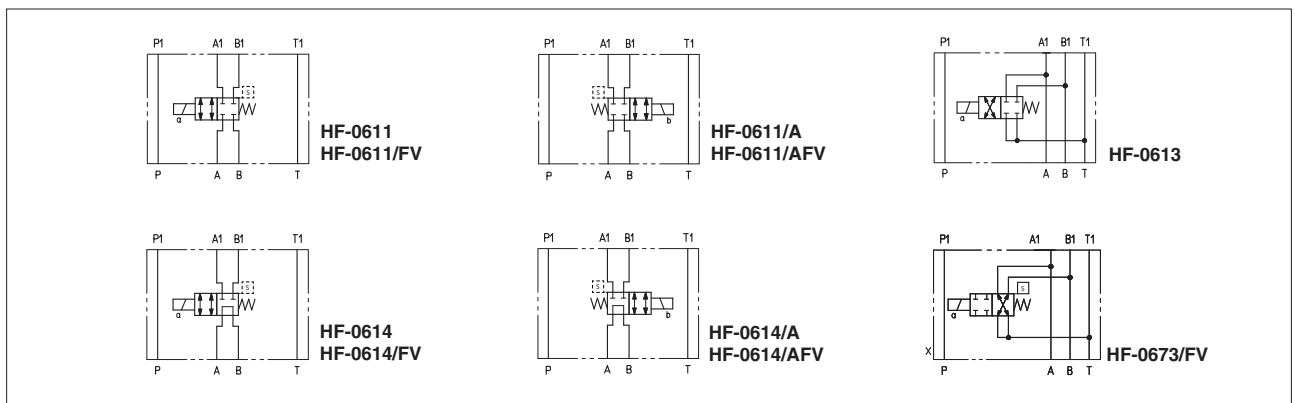

3 MAIN CHARACTERISTICS OF HF-* DIRECTIONAL VALVES

Assembly position / location	Any position for all valves
Subplate surface finishing	Roughness index Ra 0,4 - flatness ratio 0,01/100 (ISO 1101)
MTTFd values according to EN ISO 13849	150 years, for further details see technical table P007
Ambient temperature	Standard -30°C ÷ +70°C /PE option -20°C ÷ +70°C /BT option -40°C ÷ +70°C
Fluid	Hydraulic oil as per DIN 51524 535; for other fluids see section 4
Recommended viscosity	15 ÷ 100 mm ² /s at 40°C (ISO VG 15 ÷ 100)
Fluid contamination class	ISO 4401 class 21/19/16 NAS 1638 class 10 (filters at 25 µm value with β ₂₅ ≥ 75 recommended)
Flow direction	As shown in the symbols of section 2
Operating pressure (standard and /FV version)	Ports P,A,B: 350 bar; Port T: 210 bar (DC solenoid); 160 bar (AC solenoid)
Maximum flow	60 l/min

3.1 Coils characteristics

Insulation class	H (180°C) for DC coils F (155°C) for AC coils Due to the occurring surface temperatures of the solenoid coils, the European standards EN ISO 13732-1 and EN ISO 4413 must be taken into account
Protection degree to DIN EN 60529	IP 65 (with connectors 666, 667, 669 correctly assembled)
Relative duty factor	100%
Supply voltage and frequency	See electric feature 7
Supply voltage tolerance	± 10%
Certification	cURus North American Standard

4 SEALS AND HYDRAULIC FLUID - for other fluids not included in below table, consult our technical office

Seals, recommended fluid temperature	NBR seals (standard) = -20°C ÷ +60°C, with HFC hydraulic fluids = -20°C ÷ +50°C FKM seals (/PE option) = -20°C ÷ +80°C HNBR seals (/BT option) = -40°C ÷ +60°C, with HFC hydraulic fluids = -40°C ÷ +50°C		
Recommended viscosity	15 ÷ 100 mm ² /s - max allowed range 2,8 ÷ 500 mm ² /s		
Fluid contamination class	ISO 4406 class 21/19/16 NAS 1638 class 10, in line filters of 25 µm (β ₂₅ ≥ 75 recommended)		
	Hydraulic fluid	Suitable seals type	Classification
	Mineral oils	NBR, FKM, HNBR	HL, HLP, HLPD, HVLP, HVLPD
	Flame resistant without water	FKM	HFDU, HFDR
	Flame resistant with water	NBR, HNBR	HFC
			Ref. Standard
			DIN 51524
			ISO 12922

5 OPTIONS

A = Solenoid mounted at side of port B. In standard versions, solenoid is mounted at side of port A.

B = Orientation of coil and proximity connectors rotated of 180°



WP = Prolonged manual override protected by a rubber cap (not for FV)

WARNING: the manual operation is not permitted for safety valves, than the valve is provided with solenoid blind rings to prevent the access to the manual override. The manual override protected by rubber cup (option /WP) is not available



6 ELECTRIC CONNECTORS ACCORDING TO DIN 43650 (to be ordered separately)

666, 667 (for AC or DC supply)		669 (for AC supply)		CONNECTOR WIRING		
				666, 667 1 = Positive ⊕ 2 = Negative ⊖ ⊕ = Coil ground		669 1,2 = Supply voltage V _{ac} 3 = Coil ground
SUPPLY VOLTAGES						
666 All voltages		667 24 AC or DC 110 AC or DC 220 AC or DC		669 110/50 AC 110/60 AC 230/50 AC 230/60 AC		

Note: for electronic connectors type **E-SD**, see tab. K500

7 ELECTRIC FEATURES

External supply nominal voltage $\pm 10\%$	Voltage code	Type of connector	Power consumption (2)	Code of spare coil DHE	
12 DC	12 DC	666 or 667	30 W	COE-12DC	
14 DC	14 DC			COE-14DC	
24 DC	24 DC			COE-24DC	
28 DC	28 DC			COE-28DC	
48 DC	48 DC			COE-48DC	
110 DC	110 DC			COE-110DC	
125 DC	125 DC			COE-125DC	
220 DC	220 DC			COE-220DC	
110/50 AC	110/50/60 AC			58 VA (3)	COE-110/50/60AC (1)
230/50 AC	230/50/60 AC			80 VA (3)	COE-230/50/60AC (1)
115/60 AC	115/60 AC	COE-115/60AC			
230/60 AC	230/60 AC	669	30 W	COE-230/60AC	
110/50 AC - 120/60 AC	110 RC			COE-110RC	
230/50 AC - 230/60 AC	230 RC			COE-230RC	

(1) Coil can be supplied also with 60 Hz of voltage frequency: in this case the performances are reduced by 10 ÷ 15% and the power consumption is 52 VA.


(2) Average values based on tests performed at nominal hydraulic condition and ambient/coil temperature of 20°C.

(3) When solenoid is energized, the inrush current is approx 3 times the holding current.

8 TECHNICAL CHARACTERISTICS OF FV INDUCTIVE POSITION SWITCH

Type of switch	contactless inductive position switch with integrated amplifier	
Supply voltage [V]	20÷32	
Ripple max [%]	≤ 10	
Max current [mA]	400	
Reaction time [ms]	15	
Max peak pressure [bar]	400	
Mechanical life	virtually infinite	
Switch logic	PNP	

9 CONNECTING SCHEME OF FV INDUCTIVE POSITION SWITCH

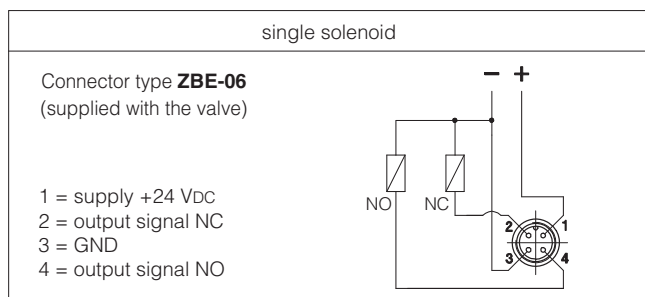

Note: the /FV position switch is not provided with a protective earth connection

10 STATUS OF OUTPUT SIGNAL FOR MODULAR VALVES WITH /FV INDUCTIVE POSITION SWITCH


	Configuration 611	Configuration 614	Configuration 673
Hydraulic configuration			
spool position			
pin 2	ON:	ON:	ON:
pin 4	ON:	ON:	ON:

Note: FV position switch can be electrically wired by the customer as NO or NC and then the status of the output signal will be in accordance to the selected configuration

= intermediate spool position corresponding to the hydraulic configuration change

11 Q/ΔP DIAGRAMS based on mineral oil ISO VG 46 at 50°C


Flow direction \ Valve type	A→A1	B→B1	A→B	A1→T	B1→T
HF-0611	1	2			
HF-0613	3	3		4	4
HF-0614	1	2	3		
HF-0673	3	3		4	4

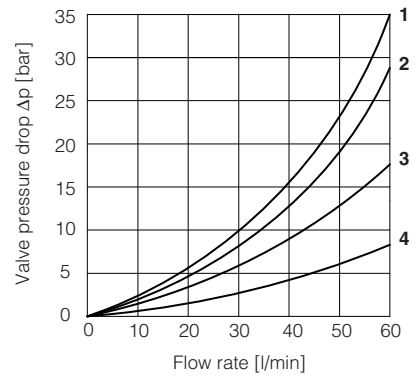

12 OPERATING LIMITS based on mineral oil ISO VG 46 at 50°C

The diagrams have been obtained with warm solenoids and power supply at lowest value ($V_{nom} - 10\%$)

Valve type	Curve
HF-0611	A
HF-0613, HF-0614, HF-0673	B

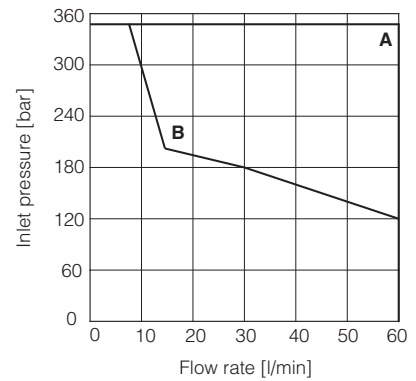

13 DIMENSIONS [mm]

Technical drawing of the valve front view showing dimensions: 31, 25.9, 15.5, 5.1, 12.7, 21.5, 30.2, 40.5, 31.75, 0.75, and $\phi 5.5$.

ISO 4401: 2005
Mounting surface: 4401-03-02-0-05
 Seals: 4 OR 108
 Ports P, A, B, T: $\phi = 7.5$ mm (max).

Side view of the valve showing dimensions: 73, 69, 7.7, and 149.7.

Top view of the valve showing dimensions: 35.5, 45, 50, and ~83.

HF-0611
HF-0613
HF-0614
HF-0673

Side view of the valve with inductive position switch connector showing dimensions: 73, 69, ~106, and ~248.

Top view of the valve with inductive position switch connector showing dimensions: 35.5, 45, 50, and ~83.

HF-0611/FV
HF-0614/FV
HF-0673/FV

① = Power supply connector code 666, 667 or 669, to be ordered separately

② = Inductive position switch connector code ZBE-06, supplied with the valve