





Codification

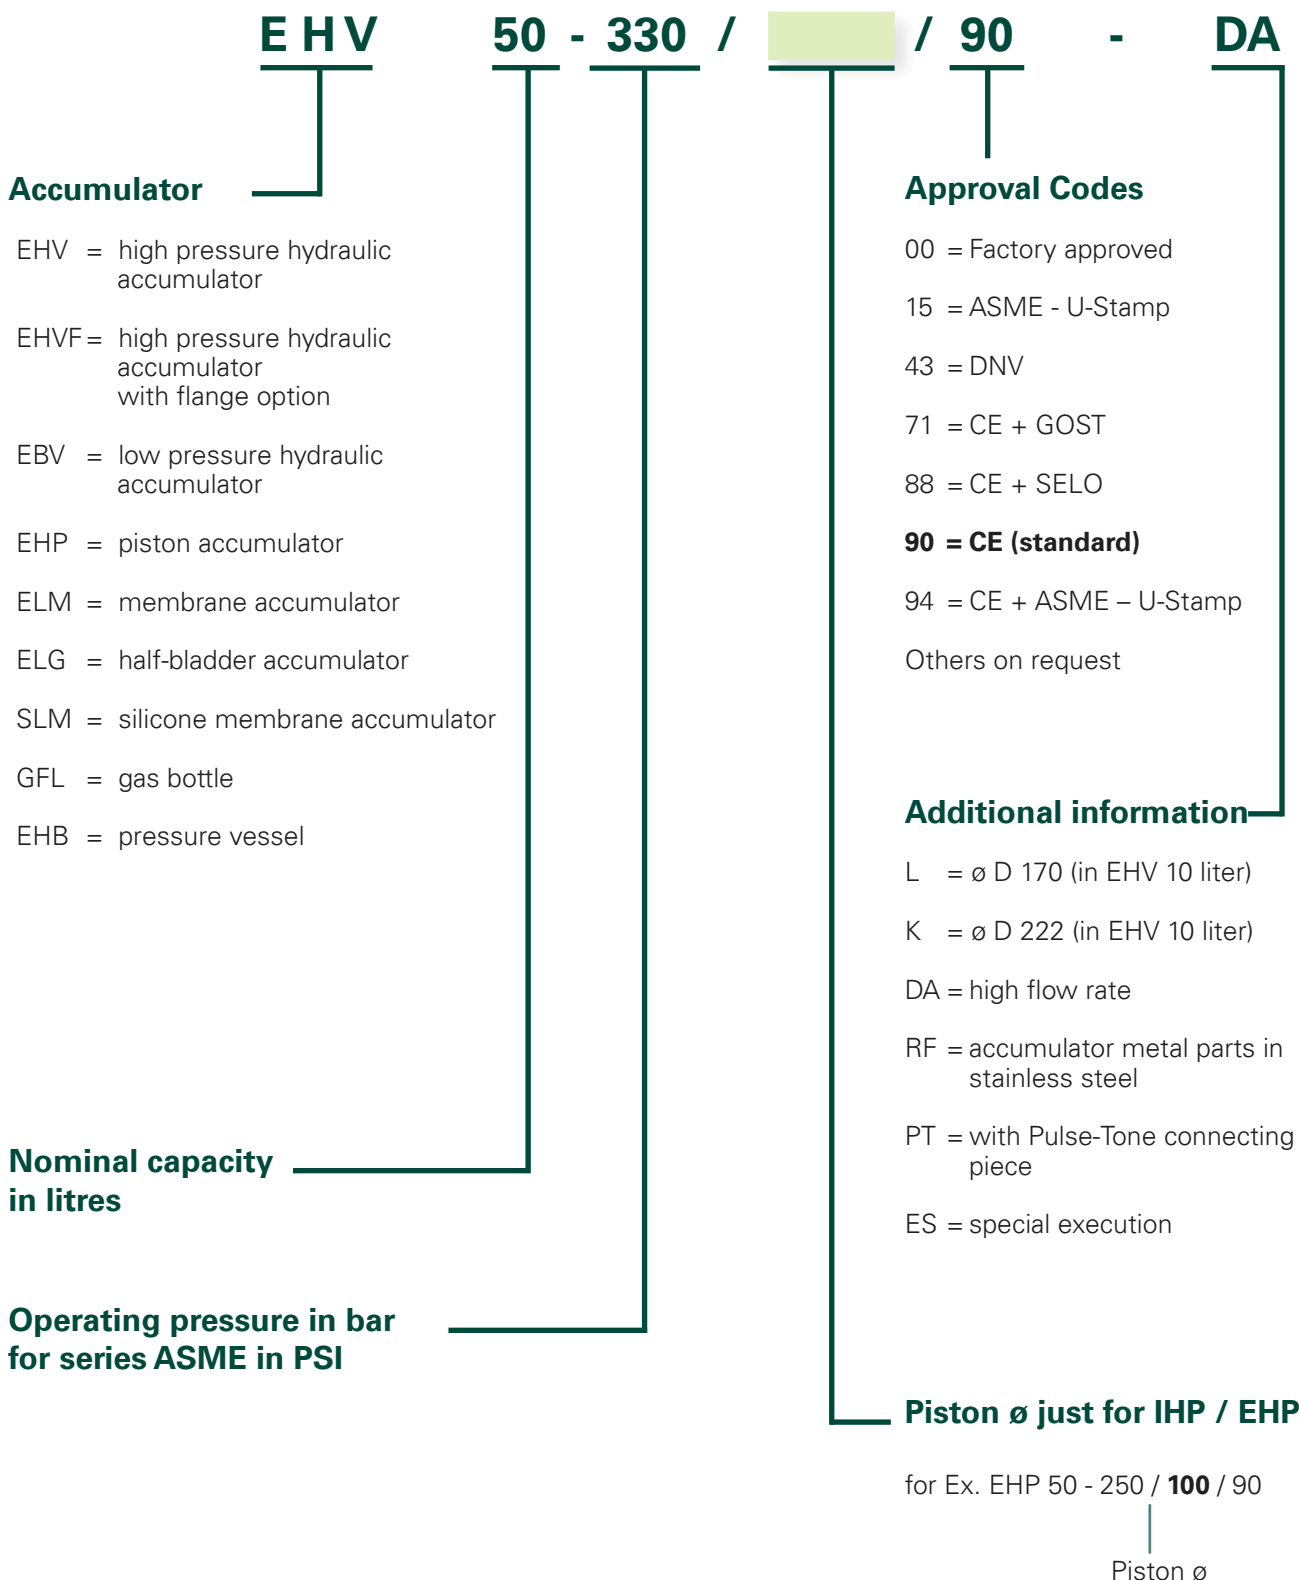

Item number

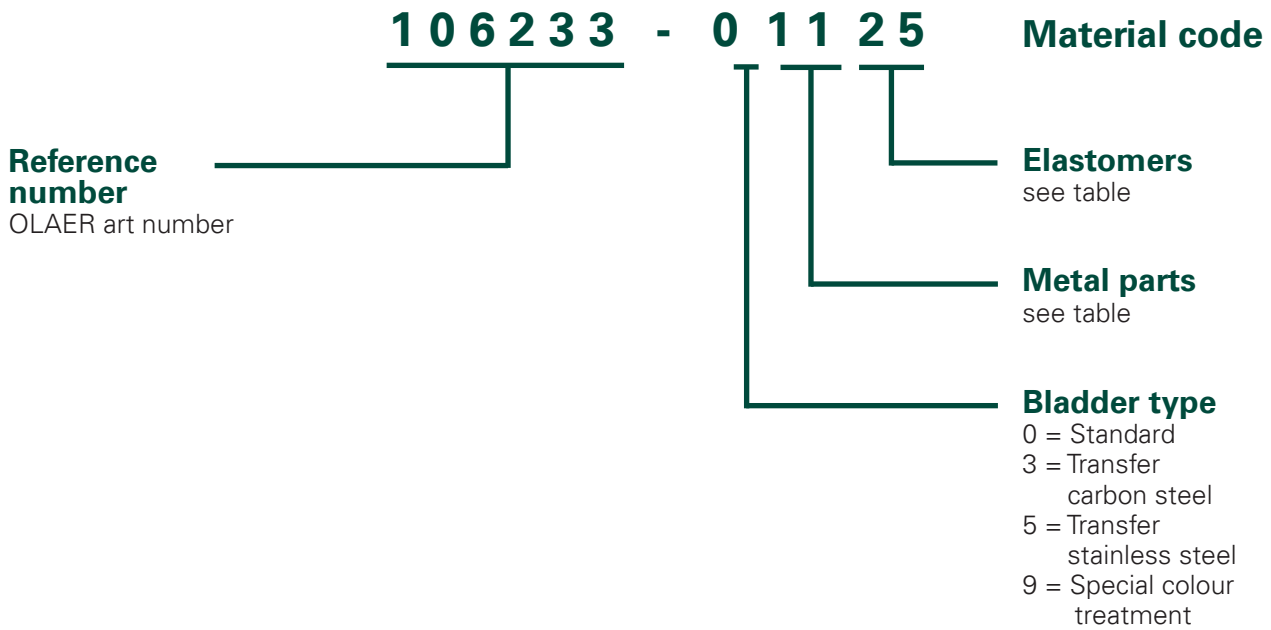

Metal parts

Code	Housing	Valve body (gas)	Port	Rubber / Retaining ring	Reduction / Flange
11	Steel - RAL 5012	Phosphate coating	Phosphate coating	Phosphate coating	Steel
12	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
34	Rilsan coated*	Phosphate coating	Phosphate coating	Phosphate coating	Steel
49	Nickel plated	Phosphate coating	Stainless steel	Stainless steel	Stainless steel

* Steel

Special construction: other combinations and coatings available. Please contact OLAER (Schweiz) AG.

Elastomers

Code	Elastomer	Operating temperature	Gas-tightness compared to code 25
02	Hydrin C	-32 °C to +115 °C	+
10	Nitrile for low temperatures	-28 °C to +70 °C	-
20	Nitrile for excellent sealing	-6 °C to +110 °C	+
25	Standard Nitrile	-20 °C to +100 °C	Standard
30	Nitrile for higher temperatures	-5 °C to +115 °C	+
35	Nitrile for very high temperatures	0 °C to +130 °C	=
37	Nitrile for very low temperatures	-57 °C to +110 °C	-
40	Butyl	-15 °C to +120 °C	+
47	Ethylene, propylene	-40 °C to +120 °C	---
50	Neoprene	-15 °C to +100 °C	-
80	FKM / FPM	-20 °C to +140 °C	---