

Shut off Valve - Cartridge, Model : KHSLB





the right connection
the right environment

Ref. No : H03320, Release March 2018 (Dimensions in mm)


Description

Shut off valve Cartridge model **KHSLB25-2.0** are seat type.
Balanced sealed poppet construction to reduce operating forces.

Unit Dimensions

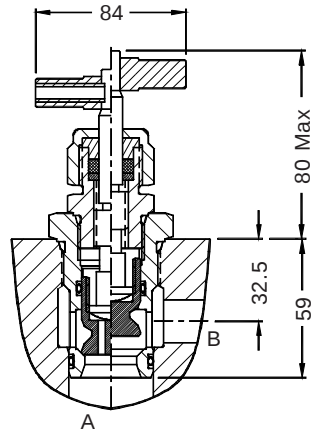

Cavity Details

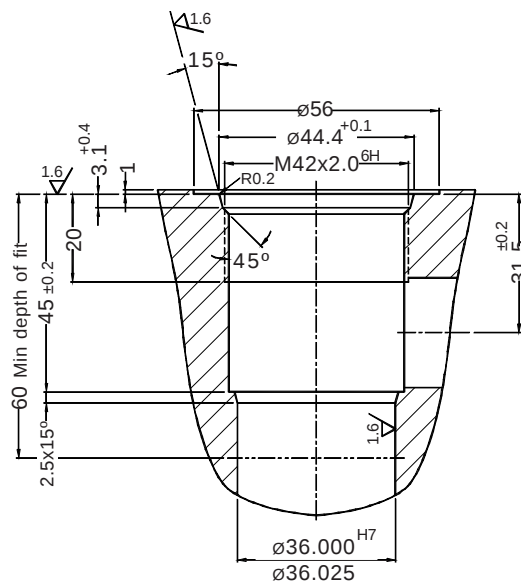

Technical Specifications

Construction	Seat type valve.
Mounting	Insert in cavity conforming to factory standard.
Mounting position	Optional.
Flow direction	From port 'A' to port 'B'.
Operating pressure	350 bar.
Hydraulic medium	Mineral oil.
Viscosity range	10 cSt to 380 cSt.
Fluid temperature range	-20 °C to +70 °C.
Fluid cleanliness requirement	As per ISO 19/16 or better.
Maximum flow handling capacity	Refer graph.

Shut off Valve - Cartridge, Model : KHSLB




the right connection
the right environment

Ref. No : H03320, Release March 2018 (Dimensions in mm)

Performance Curves

Oil used : ISO VG 68,
Viscosity : 68 cSt @ 40 °C
Test conducted at : 50 °C.

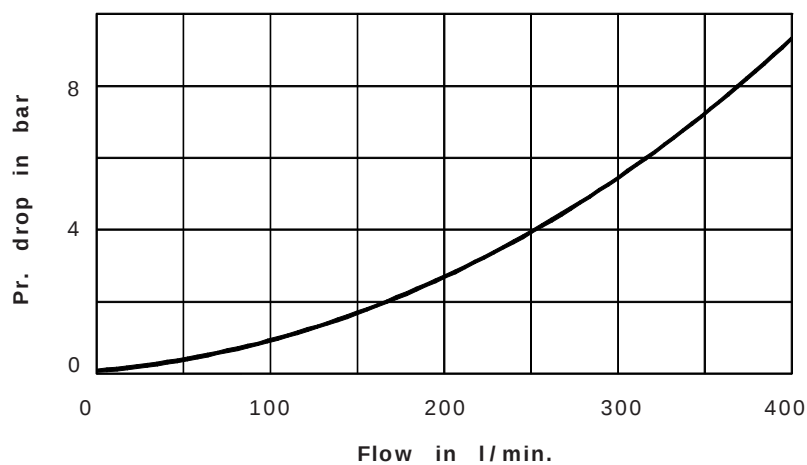

Ordering Code

