


Straight Bulkhead Couplings

SV

Dimensions in mm

DIN Fittings

Metric Tube end as per ISO 8434

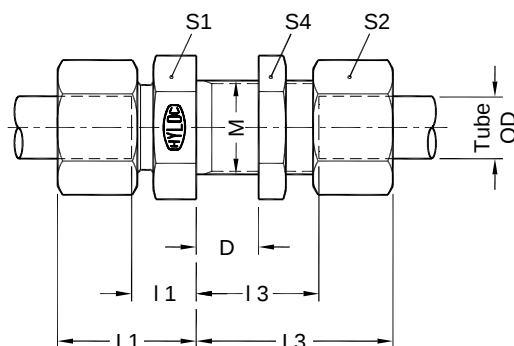

D = 16mm (max)

Lock nut part number - GM

Part No.	Series	Tube od	M	I 1	I 3	* *		S1	S2	S4
						L1	L3			
SV06PL	Light L 250 bar	6	M12 x 1.5	7	27.0	22.5	42.5	17	14	17
SV08PL		8	M14 x 1.5	8	27.0	23.0	42.0	19	17	19
SV10PL		10	M16 x 1.5	10	28.0	25.5	43.5	22	19	22
SV12PL		12	M18 x 1.5	10	29.0	25.0	44.0	24	22	24
SV15PL		15	M22 x 1.5	12	31.0	28.0	47.0	27	27	30
SV18PL	160 bar	18	M26 x 1.5	13.5	32.5	30.5	49.5	32	32	36
SV22PL		22	M30 x 2.0	16.5	34.5	33.5	51.5	36	36	41
SV28PL	100 bar	28	M36 x 2.0	18.5	35.5	36.5	53.5	41	41	46
SV35PL		35	M45 x 2.0	18.5	36.5	41.5	59.5	50	50	55
SV42PL		42	M52 x 2.0	19	36.0	42.5	59.5	60	60	65
SV06PS	Heavy S 630 bar	6	M14 x 1.5	12	29.0	27.5	44.5	19	17	19
SV08PS		8	M16 x 1.5	13	29.0	28.0	44.0	22	19	22
SV10PS		10	M18 x 1.5	14.5	29.5	31.5	46.5	24	22	24
SV12PS		12	M20 x 1.5	14.5	30.5	31.0	47.0	27	24	27
SV16PS		16	M24 x 1.5	16.5	31.5	35.5	50.5	32	30	32
SV20PS	400 bar	20	M30 x 2.0	17.5	33.5	40.0	56.0	41	36	41
SV25PS		25	M36 x 2.0	20	35.0	45.0	60.0	46	46	46
SV30PS		30	M42 x 2.0	21.5	37.5	49.5	65.5	50	50	50
SV38PS	250 bar	38	M52 x 2.0	22	37.0	53.5	68.5	65	60	65

* Dimensions given are approx figures with tightened nut.