


PH 475 - STEAM HOSE WITH HELICAL WIRE

Polyhose Proprietary Product

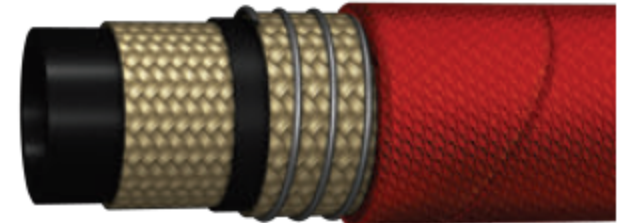

Construction

Core Black colour, EPDM rubber resistant to high temperature steam

Reinforcement Double steel wire braids with helical wire

Cover Red Colour, EPDM rubber resistant to heat and weather

Application Hardwall hose with steel cord reinforcement for steam at a maximum working pressure of 18 bar, used in chemical industries and industrial application in general , where a particular bending radius is necessary

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	kg/m
PH475-32	-32	51	2	51.0	2.72	69.0	260	18	2610	180	27.6	700	2.971
PH475-40	-40	63	2.1/2	63.0	3.39	86.0	260	18	2610	180	33.5	850	4.574
PH475-48	-48	76	3	76.0	3.86	98.0	260	18	2610	180	38.6	980	5.335



Temperature Range: Continuous: -40°C to +210°C Steam