


PH729 / PH730 - LOW PRESSURE CONDUCTIVE / NON - CONDUCTIVE

Polyhose Proprietary Product

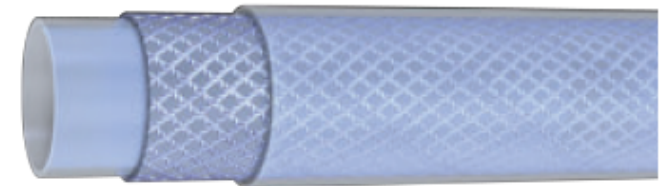

Construction

Core Polyamide

Reinforcement Single braid of synthetic fiber

Cover Polyurethane, Transparent

Application Conventional paint Spraying, Low pressure paint circulation and supply, Low pressure electrostatic lacquer system, Low pressure chemical product supply systems

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH729 / PH730-04	-04	06	1/4	6.4	0.413	10.5	290	20	1,170	80	1.0	25	72
PH729 / PH730-05	-05	08	5/16	8.0	0.472	12.0	250	17	1,015	70	1.2	30	85
PH729 / PH730-06	-06	10	3/8	9.5	0.555	14.1	220	15	880	60	1.4	35	113



Temperature Range: Continuous: -40°C to +95°C

Temp. not to exceed +70°C for Air and Water based fluids