


PH 607 - STEEL MILL WATER SUCTION AND DELIVERY HOSE WITH FIBER GLASS COVER

Polyhose Proprietary Product

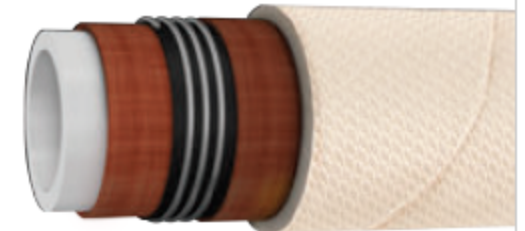

Construction

- Core** White colour, EPDM Rubber resistant to hot water
- Reinforcement** High tensile synthetic textile cord with wire helix and two cross anti static copper wire
- Cover** Fiber glass cloth cover
- Application** Water suction and delivery hose for application in Steel Mills and Glass industries. The Fiber glass cover resists occasional contact of molten particles and protection against flame

Item Code	Dash Size	ID		OD		WP		BP		W
		inch	mm	inch	mm	psi	bar	psi	bar	kg/m
PH607-16	-16	1	25.0	1.54	39.0	150	10	435	30	0.90
PH607-20	-20	1.1/4	32.0	1.81	46.0	150	10	435	30	1.40
PH607-24	-24	1.1/2	38.0	2.13	54.0	150	10	435	30	1.70
PH607-32	-32	2	51.0	2.72	69.0	150	10	435	30	1.98
PH607-40	-40	2.1/2	64.0	3.39	86.0	150	10	435	30	3.20
PH607-48	-48	3	76.0	3.86	98.0	150	10	435	30	3.80
PH607-64	-64	4	102.0	4.88	124.0	150	10	435	30	5.20



Temperature Range: Continuous: -40°C to +130°C Outside Temperature: Up to 500°C